

Model PLU

Louvered Return Air Access Panel - Up Swing and Removable Door For vertical stack heat pumps, fan coils & air handlers

Powder paint tough coating provides a finished appearance in living areas with a stamped return air grille at the lower section of the door face.

Acoustical lining on the access door and optional sound baffle few inches behind the grille absorb internal noise and attenuate its transmission to the living area.

The door can be removed in a nearly upright position to provide access for the filter change and for retrieval of the unit's chassis for maintenance.



The grille height is standard at 10" but other heights are offered as an option allowing to customize the free area.

| Important! Needs clearance to swing-up.
Not ideal in corridors or in tight spaces.



Features

- Sturdy welded construction
- Made of galvanized steel 22 ga. default, other gauges (optional)
- Scratch-resistant powder paint, white is standard, other colors (optional)
- Magnetic catches (default)
- Key lock and various quarter-turn latches (optional)
- 5/8 acoustical fiberglass insulation

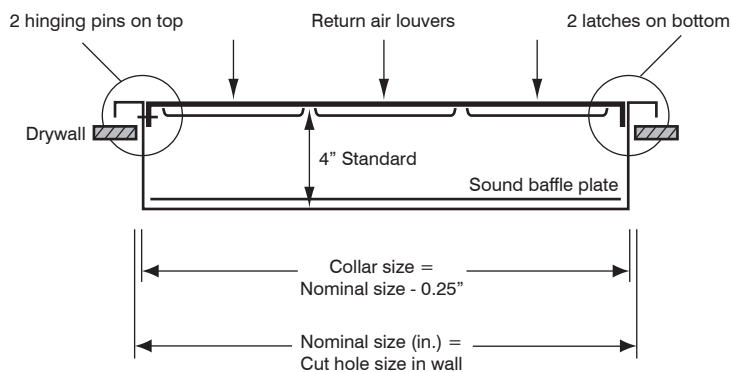

Simple to order PLU:

Standard units with or without options require no drawings for production, just specify wall opening width and height for ordering standard units. Add option suffix for ordering options. Custom designs are available and necessitate a drawing.

How to Order?

See How to Order Access Panels Series document:
airvector-panels.com/how-to-order