






MODELS LRMF-LRIF-LRTF FOR TEE BAR LAY-IN INSTALLATIONS

Series **LR** filter grilles have their face lanced with rows of fins capable of transferring or returning high air volumes with minimum air pressure loss. The fins are set at 40° and spaced 1/2" apart. The face swings in or out of the fixed back pan for easy access to the 1" standard filter or filter media (supplied by others). Two locking arms opposite to the two concealed hinges provide secure locking of the face in an unobtrusive manner.

Model **LRMF** has steel back pan with heavy gauge steel reinforcing corners equivalent to 18 ga. so as to minimize damage due to handling.

Model **LRIF** has an insulated back pan consisting of a fixed extruded aluminum frame and a molded fiberglass pan suitable for round duct connections up to 14" D. and scored for easy cutting of collar opening. This model has sturdy corners so as to minimize damage due to handling.

Model **LRTF** has a square filter frame to accommodate 20" x 20" filters and ducts of the same listed size. This model has sturdy corners so as to minimize damage due to handling.

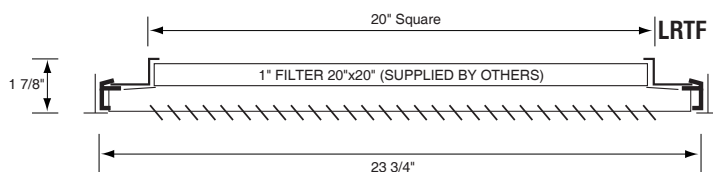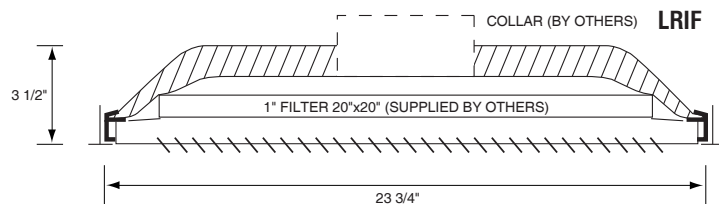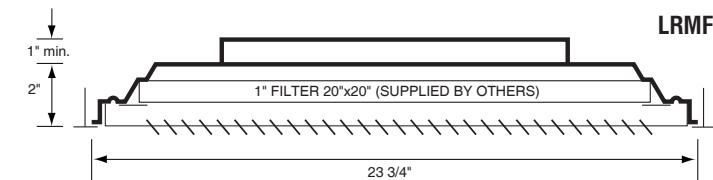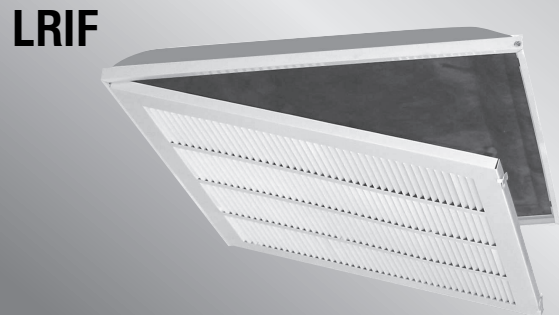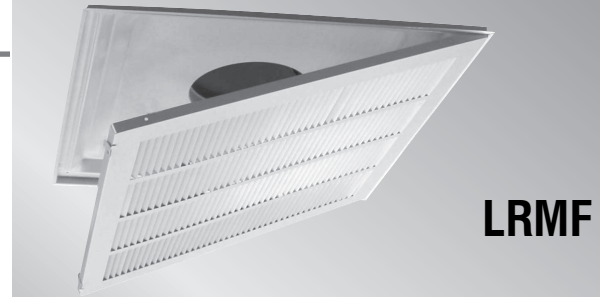

HOW TO ORDER

	LRMF	2408	
M	For metal back pan	●	●
I	For molded f. glass back pan	●	●
T	For rectangular duct connection		
			Collar Size
			24" x 24" Face Size