


1 Way Adjustable Curved Blade Supply Grille Recessed Blades


- Material:** Extruded aluminum with mechanically fastened corners.
- Mounting:** Drywall or any surface mounting. Countersunk mounting holes on frame.
- Air Pattern:** 90° Diffusion. Adjustable blades 2/3" spacing.


GCB10


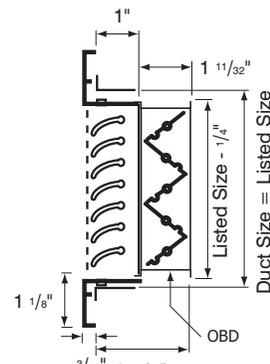
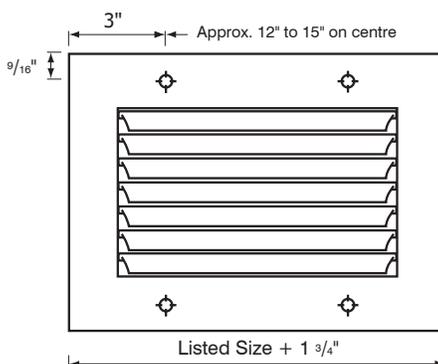
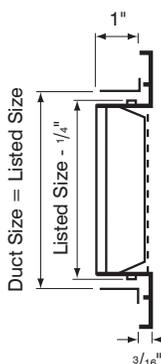
(Default)

Standard discharge pattern (Vertical)

- GCB10-WV
- GCB17-WV With OBD


Alternate discharge pattern (Horizontal)

- GCB10-WH
- GCB17-WH With OBD




Blade Deflection Options

- Adjustable Blades (Default) -AB
- Fixed Blades -FB

Options

- Supplied w/sub frame -SF
- Debris (Bird) Screen -DS
- Insect Screen -IS
- Flange Gasket -GK
- Neck Gasket -GN
- One Piece -U



Finish

<input type="checkbox"/> /W White (default)	<input type="checkbox"/> /B Brushed Aluminium	<input type="checkbox"/> /M Mill Finish	<input type="checkbox"/> /L Brushed and Lacquered	<input type="checkbox"/> Custom (Please Specify)
--	--	--	--	---

Panel Option for T-bar lay-in Ceiling

	Steel (WxH)	Aluminum (WxH)
<input type="checkbox"/>	-X1212	-Y1212
<input type="checkbox"/>	-X1224	-Y1224
<input type="checkbox"/>	-X2412	-Y2412
<input type="checkbox"/>	-X2424	-Y2424
<input type="checkbox"/>	-X2448	-Y2448
<input type="checkbox"/>	-X4824	-Y4824
<input type="checkbox"/>	-X2020	-Y2020

No fastening options available

Fastening Method

<input type="checkbox"/> -1 No Fastening	<input type="checkbox"/> -2 Spring clip	<input type="checkbox"/> -3 Screw holes (Default)
--	---	---

Schedule type: _____

Job: _____

Architect: _____

Engineer: _____

Contractor: _____