


ALB80 Heavy-duty Deflected Bar Grille

Material: Extruded aluminum
Lengths over 72 inches supplied as multiple sections






Opposed Blade Damper (optional):
Galvanized steel construction
Key-operated through grille face

Braces set at max 11"
(with -RF max 6")

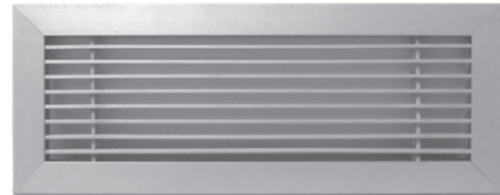

ALB80 / ALB87

- ALB80 = Grille Only
- ALB87 = Grille + OBD
(Min Width 3")
- ALB80-L = Grille
+ Air Equalizing Deflector
(Min Width 4")
- ALB87-L = Grille + OBD +
Air Equalizing Deflector
(Min Width 4")

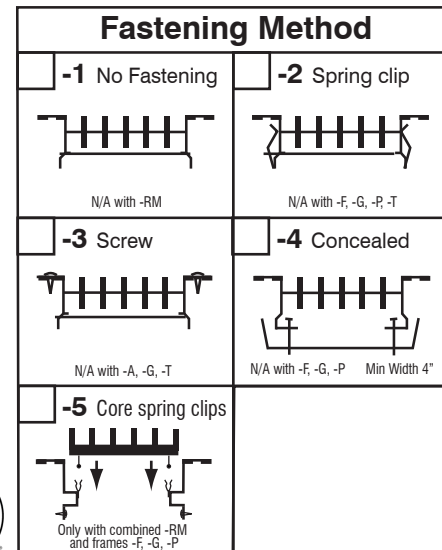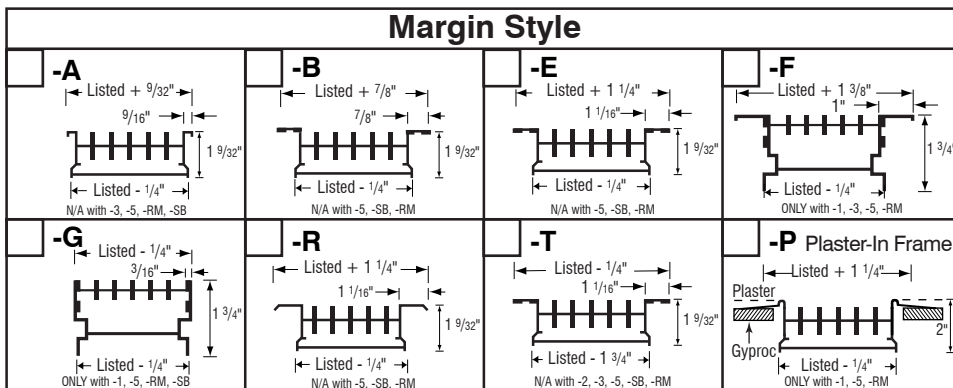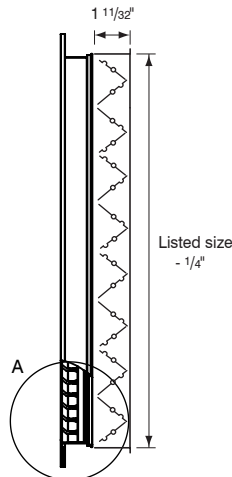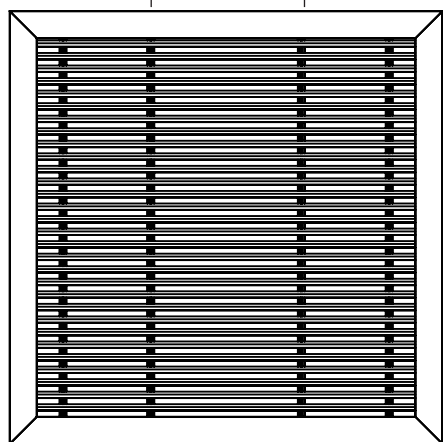


Finish

/W White (Default)	/M Mill Finish	/A Anodized	/B Brushed Aluminum N/A with -G, -R	/L Brushed & Lacquered N/A with -G, -R	/C Custom (Please Specify)
---------------------------------	--------------------------	-----------------------	--	---	--------------------------------------



- Security Ceiling Wire -CW**
- Mounting Brackets for Sheetrock -SB**
(3/4" from the face) Only w/ -A -G
- Reinforced Floor Application -RF**
(6" max width recommended for high traffic, 8" max width for occasional traffic)
- Removable Core Application -RM**
Only w/ -F, -G
- Frame Gasket -GK**
- Vertical Bars -V**
- Debris Screen or Bird Screen (1/2" x 1/2" Mesh) -DS**
- Insect Screen -IS**



Up to 1/8 inch increments without damper.

Dimensions shown contain expansion tolerances based on temperature rise of 40°F above the ambient temperature at which the material is fabricated.

Schedule Type: _____

Project: _____

Architect: _____

Engineer: _____

Contractor: _____