

### ALB Architectural Linear Bar Grille


**Material:** Extruded aluminum.

Lengths over 72 inches supplied as multiple sections.


**Opposed Blade Damper (optional):**

Galvanized steel construction.

Key-operated through grille face.

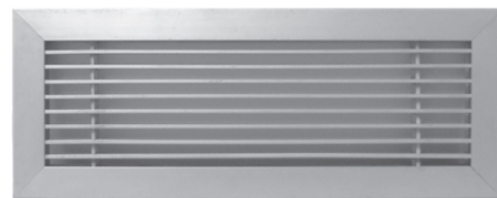


**ALB40 / ALB47**





☐ **ALB40 = Grille Only**

Braces set at max 11"  
(with -RF max 6")

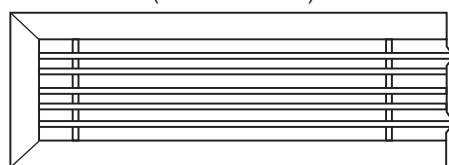


☐ **ALB47 = Grille + OBD**


(Min Width 3")



☐ **ALB40-L = Grille + Air Equalizing Deflector**  
(Min Width 4")

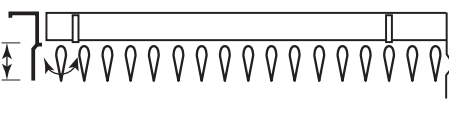

☐ **ALB47-L = Grille + OBD + Air Equalizing Deflector**  
(Min Width 4")




| Margin Style                                                                                                            |                                                                                                                    |                                                                                                                            |                                                                                                                                    |
|-------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------|
| <input type="checkbox"/> <b>-A</b><br>Listed + 9/32"<br>9/16" 1 9/32"<br>Listed - 1/4"<br>N/A with -3, -4, -5, -RM, -SB | <input type="checkbox"/> <b>-B</b><br>Listed + 7/8"<br>7/8" 1 9/32"<br>Listed - 1/4"<br>N/A with -5, -SB, -RM      | <input type="checkbox"/> <b>-E</b><br>Listed + 1 1/4"<br>1 1/16" 1 9/32"<br>Listed - 1/4"<br>N/A with -5, -SB, -RM         | <input type="checkbox"/> <b>-F</b><br>Listed + 1 3/8"<br>1" 1 3/4"<br>Listed - 1/4"<br>ONLY with -1, -3, -5, -RM                   |
| <input type="checkbox"/> <b>-G</b><br>Listed - 1/4"<br>3/16" 1 3/4"<br>Listed - 1/4"<br>ONLY with -1, -5, -RM, -SB      | <input type="checkbox"/> <b>-R</b><br>Listed + 1 1/4"<br>1 1/16" 1 9/32"<br>Listed - 1/4"<br>N/A with -5, -SB, -RM | <input type="checkbox"/> <b>-T</b><br>Listed - 1/4"<br>1 1/16" 1 9/32"<br>Listed - 1 3/4"<br>N/A with -2, -3, -5, -SB, -RM | <input type="checkbox"/> <b>-P Plaster-In Frame</b><br>Plaster Gyproc<br>Listed + 1 1/4"<br>Listed - 1/4"<br>ONLY with -1, -5, -RM |

| Finish                                                   |                                                   |                                                |                                                                           |                                                                              |                                                               |
|----------------------------------------------------------|---------------------------------------------------|------------------------------------------------|---------------------------------------------------------------------------|------------------------------------------------------------------------------|---------------------------------------------------------------|
| <input type="checkbox"/> <b>/W</b><br>White<br>(Default) | <input type="checkbox"/> <b>/M</b><br>Mill Finish | <input type="checkbox"/> <b>/A</b><br>Anodized | <input type="checkbox"/> <b>/B</b><br>Brushed Aluminum<br>N/A with -G, -R | <input type="checkbox"/> <b>/L</b><br>Brushed & Lacquered<br>N/A with -G, -R | <input type="checkbox"/> <b>/C Custom</b><br>(Please Specify) |



| Fastening Method                                                                                     |                                                                                  |
|------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------|
| <input type="checkbox"/> <b>-1 No Fastening</b><br>N/A with -RM                                      | <input type="checkbox"/> <b>-2 Spring clip</b><br>N/A with -F, -G, -P, -T        |
| <input type="checkbox"/> <b>-3 Screw</b><br>N/A with -A, -G, -T                                      | <input type="checkbox"/> <b>-4 Concealed</b><br>N/A with -F, -G, -P Min Width 4" |
| <input type="checkbox"/> <b>-5 Core spring clips</b><br>Only with combined -RM and frames -F, -G, -P |                                                                                  |

- ☐ **Security Ceiling Wire -CW**
- ☐ **Mounting Brackets for Sheetrock -SB**  
(3/4" from the face) Only w/ -A -G
- ☐ **Reinforced Floor Application -RF**  
(6" max width for all frames, for over 6" use -F up to 20" more)
- ☐ **Removable Core Application -RM**  
(For ceiling add -5, -CW ; for wall add -5)
- ☐ **Frame Gasket -GK**
- ☐ **Vertical Bars -V**



Up to 1/8 inch increments without damper.

Dimensions shown contain expansion tolerances based on temperature rise of 40°F above the ambient temperature at which the material is fabricated.

Schedule type: \_\_\_\_\_

Job: \_\_\_\_\_

Architect: \_\_\_\_\_

Engineer: \_\_\_\_\_

Contractor: \_\_\_\_\_