

ALB Architectural Linear Bar Grille


Material: Extruded aluminum.

Lengths over 72 inches supplied as multiple sections.


Opposed Blade Damper (optional):

Galvanized steel construction.

Key-operated through grille face.


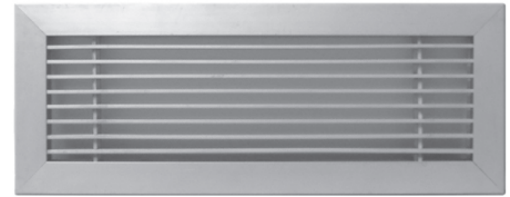


ALB60 / ALB67





☐ **ALB60 = Grille Only**

Braces set at max 11"
(with -RF max 6")

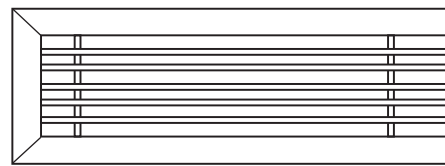


☐ **ALB67 = Grille + OBD**


(Min Width 3")



☐ **ALB60-L = Grille
+ Air Equalizing Deflector**
(Min Width 4")

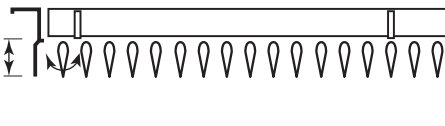

☐ **ALB67-L = Grille + OBD +
Air Equalizing Deflector**
(Min Width 4")



2 3/32"


Margin Style			
☐ -A Listed + 9/32" 9/16" Listed - 1/4" N/A with -3, -4, -5, -RM, -SB	☐ -B Listed + 7/8" 7/8" Listed - 1/4" N/A with -5, -SB, -RM	☐ -E Listed + 1 1/4" 1 1/16" Listed - 1/4" N/A with -5, -SB, -RM	☐ -F Listed + 1 3/8" 1" Listed - 1/4" ONLY with -1, -3, -5, -RM
☐ -G Listed - 1/4" 3/16" Listed - 1/4" ONLY with -1, -5, -RM, -SB	☐ -R Listed + 1 1/4" 1 1/16" Listed - 1/4" N/A with -5, -SB, -RM	☐ -T Listed - 1/4" 1 1/16" Listed - 1 3/4" N/A with -2, -3, -5, -SB, -RM	☐ -P Plaster-In Frame Listed + 1 1/4" Plaster Gyproc Listed - 1/4" ONLY with -1, -5, -RM

Fastening Method	
☐ -1 No Fastening N/A with -RM	☐ -2 Spring clip N/A with -F, -G, -P, -T
☐ -3 Screw N/A with -A, -G, -T	☐ -4 Concealed N/A with -F, -G, -P Min Width 4"
☐ -5 Core spring clips Only with combined -RM and frames -F, -G, -P	

Finish					
☐ /W White (Default)	☐ /M Mill Finish	☐ /A Anodized	☐ /B Brushed Aluminum N/A with -G, -R	☐ /L Brushed & Lacquered N/A with -G, -R	☐ /C Custom (Please Specify)



- ☐ **Security Ceiling Wire -CW**
- ☐ **Mounting Brackets for Sheetrock -SB**
(3/4" from the face) Only w/ -A -G
- ☐ **Reinforced Floor Application -RF**
(6" max width for all frames, for over 6" use -F up to 20" more)
- ☐ **Removable Core Application -RM**
(For ceiling add -5, -CW ; for wall add -5)
- ☐ **Frame Gasket -GK**
- ☐ **Vertical Bars -V**



Up to 1/8 inch increments without damper.

Dimensions shown contain expansion tolerances based on temperature rise of 40°F above the ambient temperature at which the material is fabricated.

Schedule type: _____

Job: _____

Architect: _____

Engineer: _____

Contractor: _____