

## ALB80 Heavy-duty Deflected Bar Grille

**Material:** Extruded aluminum  
Lengths over 72 inches supplied as multiple sections






**Opposed Blade Damper (optional):**  
Galvanized steel construction  
Key-operated through grille face

Braces set at max 11"  
(with -RF max 6")



**ALB80 / ALB87**

- ALB80 = Grille Only**
- ALB87 = Grille + OBD**  
(Min Width 3")
- ALB80-L = Grille + Air Equalizing Deflector**  
(Min Width 4")
- ALB87-L = Grille + OBD + Air Equalizing Deflector**  
(Min Width 4")

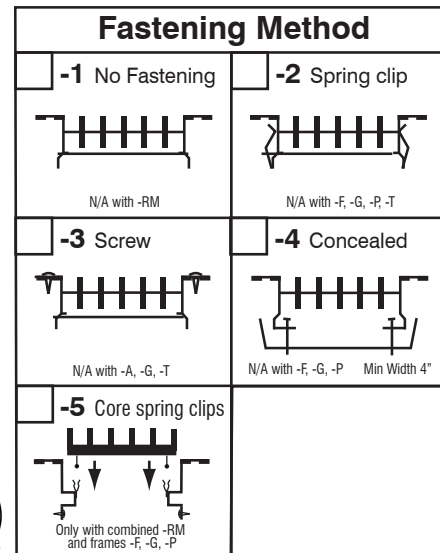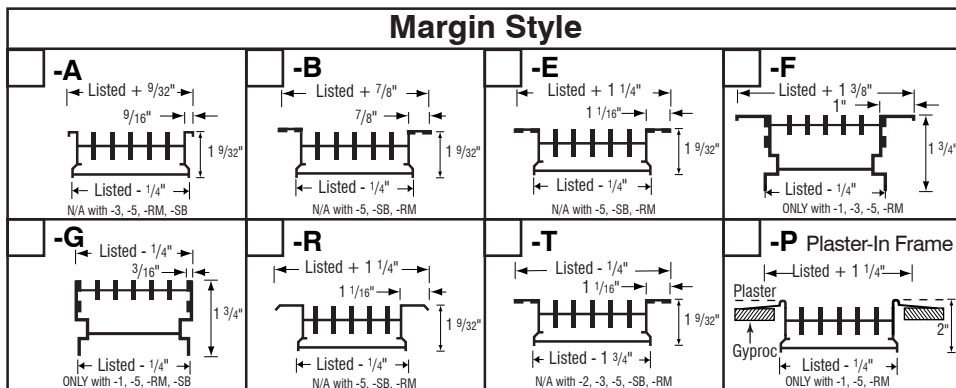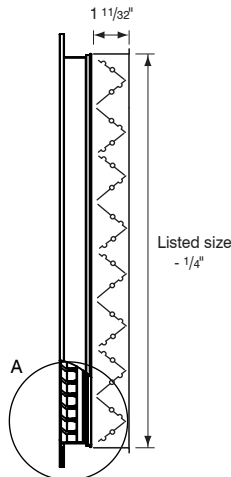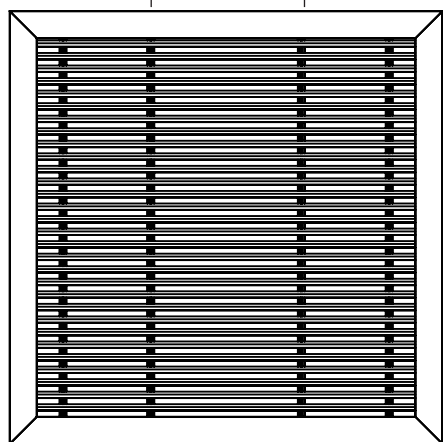


**Finish**

<b>/W</b> White (Default)	<b>/M</b> Mill Finish	<b>/A</b> Anodized	<b>/B</b> Brushed Aluminum N/A with -G, -R	<b>/L</b> Brushed & Lacquered N/A with -G, -R	<b>/C</b> Custom (Please Specify)
---------------------------------	--------------------------	-----------------------	--	---	--------------------------------------



- Security Ceiling Wire -CW**
- Mounting Brackets for Sheetrock -SB**  
(3/4" from the face) Only w/ -A -G
- Reinforced Floor Application -RF**  
(6" max width recommended for high traffic, 8" max width for occasional traffic)
- Removable Core Application -RM**  
Only w/ -F, -G
- Frame Gasket -GK**
- Vertical Bars -V**
- Debris Screen or Bird Screen (1/2" x 1/2" Mesh) -DS**
- Insect Screen -IS**



Up to 1/8 inch increments without damper.

Dimensions shown contain expansion tolerances based on temperature rise of 40°F above the ambient temperature at which the material is fabricated.

Schedule Type: \_\_\_\_\_

Project: \_\_\_\_\_

Architect: \_\_\_\_\_

Engineer: \_\_\_\_\_

Contractor: \_\_\_\_\_