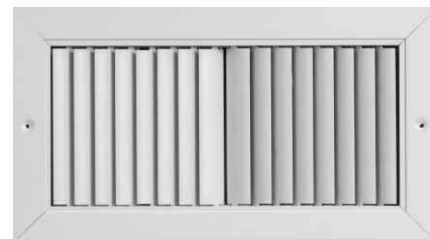
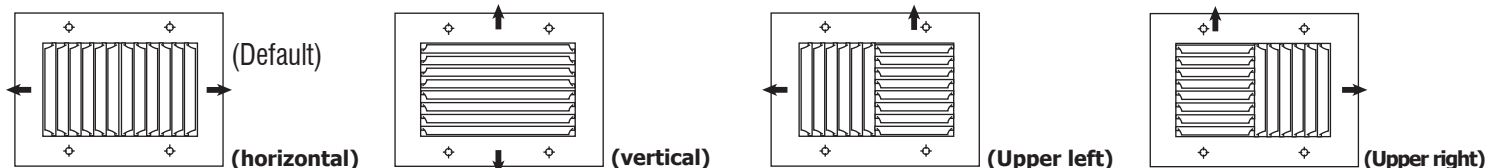


2 Way Adjustable Curved Blade Supply Grille Recessed Blades

- Material:** Extruded aluminum with mechanically fastened corners.
- Mounting:** Drywall or any surface mounting. Countersunk mounting holes on frame.
- Air Pattern:** 90° or 180° Diffusion.
Adjustable blades 2/3" spacing.


GCB20


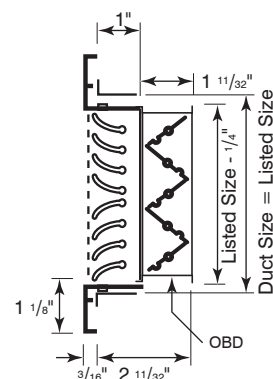
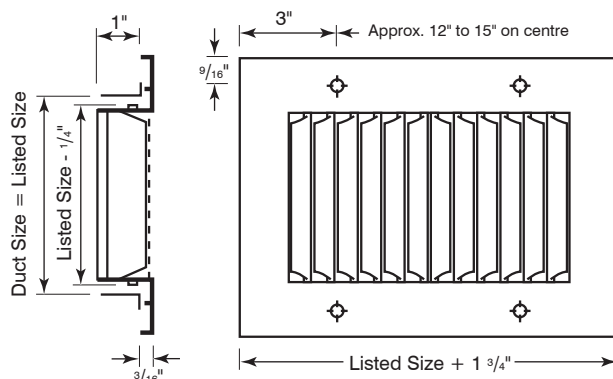

- | | | | |
|---|--|--|--|
| ☐ Standard discharge pattern | ☐ Alternate discharge pattern | ☐ Alternate discharge pattern | ☐ Alternate discharge pattern |
| ☐ GCB20-WOH | ☐ GCB20-WOV | ☐ GCB20-WUL | ☐ GCB20-WUR |
| ☐ GCB27-WOH With OBD | ☐ GCB27-WOV With OBD | ☐ GCB27-WUL With OBD | ☐ GCB27-WUR With OBD |

Blade Deflection Options

- ☐ Adjustable Blades (default) **-AB**
- ☐ Fixed Blades **-FB**

Options

- ☐ Supplied w/sub frame **-SF**
- ☐ Debris (Bird) Screen **-DS**
- ☐ Insect Screen **-IS**
- ☐ Flange Gasket **-GK**
- ☐ Neck Gasket **-GN**
- ☐ One Piece **-U**








Panel Option for T-bar lay-in Ceiling

	Steel (WxH)	Aluminum (WxH)
☐	-X1212	☐ -Y1212
☐	-X1224	☐ -Y1224
☐	-X2412	☐ -Y2412
☐	-X2424	☐ -Y2424
☐	-X2448	☐ -Y2448
☐	-X4824	☐ -Y4824
☐	-X2020	☐ -Y2020

No fastening options available

Fastening Method

-1	-2	-3	-4	-6
No Fastening	Spring clip	Screw holes (Standard)	Concealed	Adhesive tape
				

Finish

/W	/B	/M	/L	/C Custom (Please Specify)
White (default)	Brushed Aluminum	Mill Finish	Brushed & Lacquered	



Schedule type: _____

Job: _____

Architect: _____

Engineer: _____

Contractor: _____