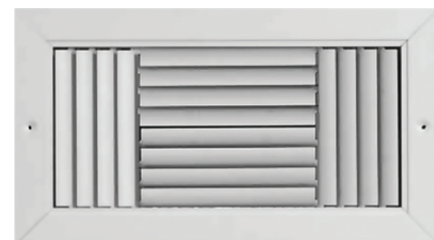




4 Way Adjustable Curved Blade Supply Grille Recessed Blades


- Material:** Extruded aluminum with mechanically fastened corners.
- Mounting:** Drywall or any surface mounting. Countersunk mounting holes on frame.
- Air Pattern:** 360° Diffusion.
Adjustable blades 2/3" spacing.


GCB40

Standard Discharge Pattern

- ☐ **GCB40-WS**
- ☐ **GCB47-WS** With OBD


Alternate Discharge Pattern (long)

- ☐ **GCB40-WL**
- ☐ **GCB47-WL** With OBD


Alternate Discharge Pattern




- ☐ **GCB40-WA**
- ☐ **GCB47-WA** With OBD

Blade Deflection Options


- ☐ Adjustable Blades (default) **-AB**
- ☐ Fixed Blades **-FB**

Options




- ☐ Supplied w/sub frame **-SF**
- ☐ Debris (Bird) Screen **-DS**
- ☐ Insect Screen **-IS**
- ☐ Flange Gasket **-GK**
- ☐ Neck Gasket **-GN**
- ☐ One Piece **-U**

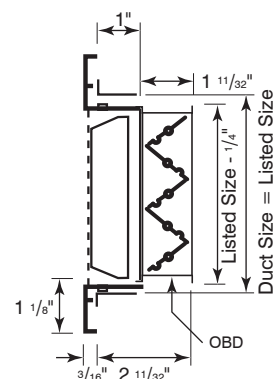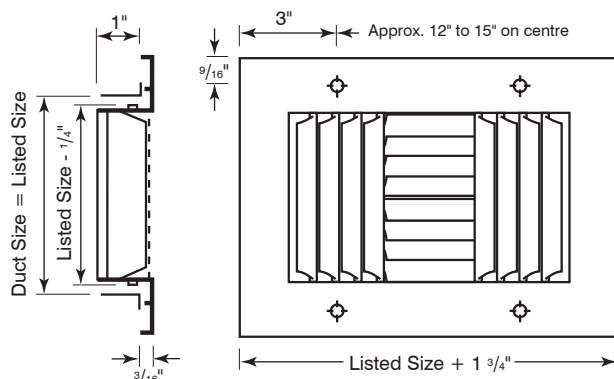

Panel Option for T-bar lay-in Ceiling

	Steel (WxH)	Aluminum (WxH)
	☐ -X1212	☐ -Y1212
	☐ -X1224	☐ -Y1224
	☐ -X2412	☐ -Y2412
	☐ -X2424	☐ -Y2424
	☐ -X2448	☐ -Y2448
	☐ -X4824	☐ -Y4824
	☐ -X2020	☐ -Y2020
	No fastening options available	

Fastening Method

-1	-2	-3	-4	-6
No Fastening	Spring clip	Screw holes (Standard)	Concealed	Adhesive tape
				

Finish

/W	/B	/M	/L	/C Custom (Please Specify)
White (default)	Brushed Aluminum	Mill Finish	Brushed & Lacquered	



Schedule type: _____

Job: _____

Architect: _____

Engineer: _____

Contractor: _____