

Double Deflection Supply Grille

Material: Extruded Aluminum Frame

Air Pattern: Adjustable Air Pattern

Horizontal Face Bars (Standard)


(Mullion required for w > 18")

- ☐ **GSA20** Steel fins
- ☐ **GSA27** Steel fins with OBD
- ☐ **GAA20** Aluminum fins
- ☐ **GAA27** Aluminum fins with OBD



Vertical Face Bars

- ☐ **GSA20-V** Steel fins
- ☐ **GSA27-V** Steel fins with OBD
- ☐ **GAA20-V** Aluminum fins
- ☐ **GAA27-V** Aluminum fins with OBD

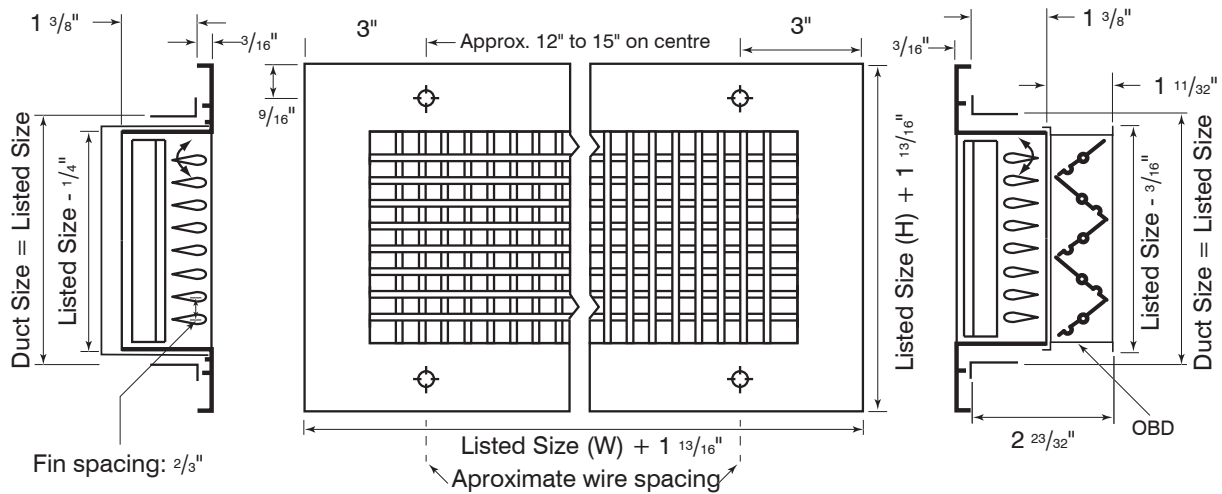

Options

☐ -GK	☐ -GN	☐ -GR		
				
Flange Gasket	Neck Gasket	Rear Gasket		
☐ -SF	☐ -DS	☐ -IS	☐ -HB	☐ -FB
Supplied w/ sub frame	Debris (Bird) Screen	Insect Screen	Hemmed bracket for -4 option	Fixed Blades 0 degrees

Finish

☐ /W	☐ /B	☐ /M	☐ /L	☐ /C Custom (Please Specify)
White (default)	Brushed Aluminium	Mill Finish	Brushed and Lacquered	



Panel Option for T-bar lay-in Ceiling

	Steel (WxH)	Aluminum (WxH)
☐ -X1212		☐ -Y1212
☐ -X1224		☐ -Y1224
☐ -X2412		☐ -Y2412
☐ -X2424		☐ -Y2424
☐ -X2448		☐ -Y2448
☐ -X4824		☐ -Y4824
☐ -X2020		☐ -Y2020

No fastening options available

Fastening Method

☐ -1	☐ -2	☐ -3	☐ -4	☐ -6
No Fastening	Spring clip	Screw holes (Standard)	Concealed	Adhesive tape
				
			See -HB option	tape

Schedule type: _____

Job: _____

Architect: _____

Engineer: _____

Contractor: _____