

1" Stormproof Louver


Standard Construction

Material	Extruded Aluminum - 6063- T5 Alloy.
Frame thickness	0.062" (1.57 mm).
Blade thickness	0.062" (1.57 mm).
Blade angle	45°.
Blade spacing	1" (25 mm).
Depth	1 ⁵ / ₁₆ " (33 mm).
Finish	Mill.


LA12


☐ LA120

Frame: Channel Frame
Duct-Mount

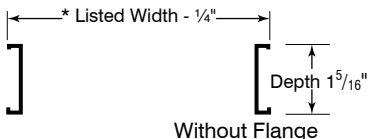


☐ LA125

Frame: Flange Frame
Flange-Mount

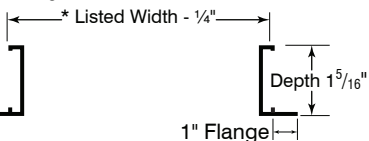


☐ LA127

Frame: Flange Frame
Flange-Mount

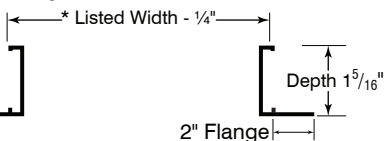

Flanged frame

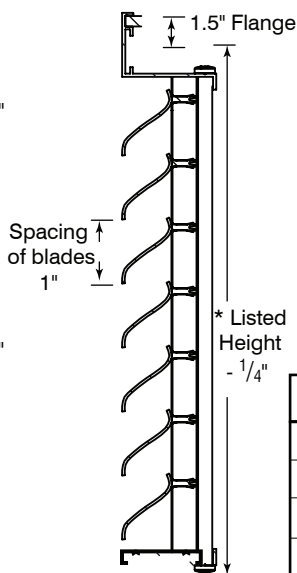

Flangeless frame

One-Piece Louver Dimensions

	Min.	Max.
Area	0.67 ft ² (0.06 m ²)	36 ft ² (3.34 m ²)
Width	10" (254 mm)	72" (1829 mm)
Height	6" (152 mm)	72" (1829 mm)

* Louver dimensions are undercut 1/4" (6.4 mm) for single sections and undercut 1/2" (12.7 mm) for multiple sections unless otherwise specified.

Options

Screen options

- ☐ -DS 19 Ga Birdscreen - 1/2" x 1/2" Openings (Default)
- ☐ -DSA 14 Ga Inter Crimped Aluminum Birdscreen - 1/2" x 1/2"
- ☐ -DSF Aluminum Birdscreen With 1" Frame
- ☐ -IS Insect Screen (18 x 14 Mesh 

Blank-off Panels (Aluminum)

- ☐ -BP0 Blank-off Panel (Non-Insulated)
- ☐ -BP1 1" Blank-off Panel (25.4 mm) (Insulated)
- ☐ -BP2 2" Blank-off Panel (50.8 mm)

Filter Holder Options

- ☐ -F1 Filter Holder 1" Deep
- ☐ -F2 Filter Holder 2" Deep

Other Options

- ☐ -ES Extended Sills 14 Ga Aluminum
- ☐ -SG Security Grilles
- ☐ -NS Welded Construction (no screws)
- ☐ -HM Hidden Mullions

Finish

- ☐ /M Mill finish (default)
- ☐ /DR Duranar Finish
- ☐ /DN Duracron Finish
- ☐ /C# (# = A,B,C, or D see RAL Chart) RAL Code: _____ (Please Specify)
- ☐ /CL Custom Baked Enamel Liquid Paint Match
- ☐ /CP Custom Powder Paint Match
- ☐ /A Clear Anodized
- ☐ /AL Light Bronze Anodized
- ☐ /AM Medium Bronze Anodized
- ☐ /AD Dark Bronze Anodized
- ☐ /AB Black Anodized



Schedule type: _____

Job: _____

Architect: _____

Engineer: _____

Contractor: _____