


Perforated Face Supply Diffuser Fixed face – 2" Collar

Material: Stamped heavy gauge Aluminium.
Finish: Powder paint coating - white.
Safety: Seismic tabs.
Mounting: Fixed horizontal 360° diffusion.
 Surface or Lay-in T-bar ceiling.


PRMD

Optional fiberglass insulation on back panel, complies with A.S.T.M. E84 flame and smoke test. (Available only on models with 24" x 24" face)

-R4 -R6

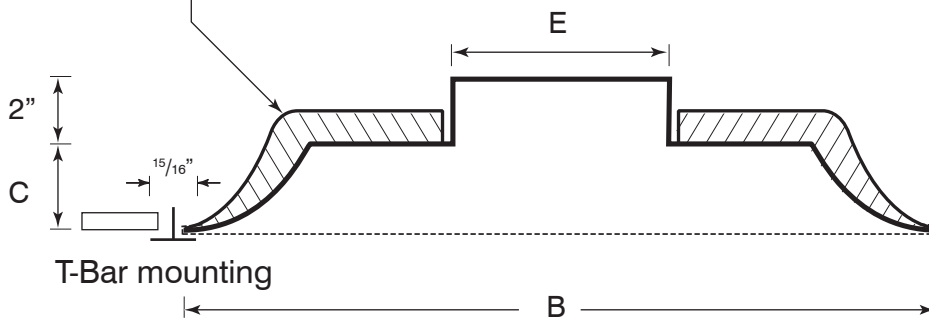

✓	Model #	Duct Size	E	Face Dim B x B	C
	PRM 1206	6	5 7/8"	11 7/8" x 11 7/8"	1 3/4"
	PRM 1208	8	7 7/8"	11 7/8" x 11 7/8"	1 3/4"
	PRM 2406	6	5 7/8"	23 7/8" x 23 7/8"	2 7/8"
	PRM 2408	8	7 7/8"	23 7/8" x 23 7/8"	2 7/8"
	PRM 2410	10	9 7/8"	23 7/8" x 23 7/8"	2 7/8"
	PRM 2412	12	11 7/8"	23 7/8" x 23 7/8"	2 7/8"
	PRM 2414	14	13 7/8"	23 7/8" x 23 7/8"	2 7/8"
	PRM 2416	16	15 7/8"	23 7/8" x 23 7/8"	2 7/8"
	PRM 2418	18	17 7/8"	23 7/8" x 23 7/8"	2 7/8"
	PRM 2420	20	19 7/8"	23 7/8" x 23 7/8"	2 7/8"

Finish	
<input type="checkbox"/> /W White (Default)	<input type="checkbox"/> /C Custom (Please Specify)



Schedule type: _____
 Job: _____
 Architect: _____
 Engineer: _____
 Contractor: _____